



Model: SR-DA3W-6S

Description:	SP6T, Reflective, PIN-Switch
Operating Frequency:	0.2 – 4 GHz
Insertion Loss:	1.9 dB Max
Isolation:	70 dB Min
VSWR ("ON" paths):	1.5:1 Max
Rise/Fall time (10% to 90% RF, 90% to 10% RF):	350 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):	400 ns Max
Operating Power:	CW&AVG: +27dBm Max
	Peak: 5W @ 1 μ S PW & 10% Duty-Cycle Max
Control Input Characteristics:	Std. TTL / Unit-Load / Floating-High
Control Logic:	6-Controls, Logic "0" = RF Path "ON"
Power Supplies:	+5($\pm$ 0.25)V @ 80mA Max
	-12($\pm$ 0.5)V @ 80mA Max
Connectors (RF):	SMA (f), Removable
Connectors (Supplies/Controls)	Solder Pins
Impedance:	50 Ohms Nominal
Quality:	Best-Commercial-Grade

Environmental Ratings:

Temperature:	{Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ Supply Voltages

- A1 [+5($\pm$ 0.25)V / -5($\pm$ 0.25)V] *
- A2 [+5($\pm$ 0.25)V / -15($\pm$ 0.5)V]
- A3 [+12($\pm$ 0.5)V / -12($\pm$ 0.5)V]
- A4 [+15($\pm$ 0.5)V / -15($\pm$ 0.5)V]

■ RF Connectors

- B1 [J1 – J6 Ports with SMA(M)]
- B2 [All SMA (M)]
- B3 [COM Port with SMA(M)]

■ Control Function


- F1 [Inverse Logic, ("1" = Path "ON")]
- F2 [3-Bit Binary Controls + Enable] ; see below for "Outline Drawing" and "Function Table"

* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SR-DA3W-6S

Outline

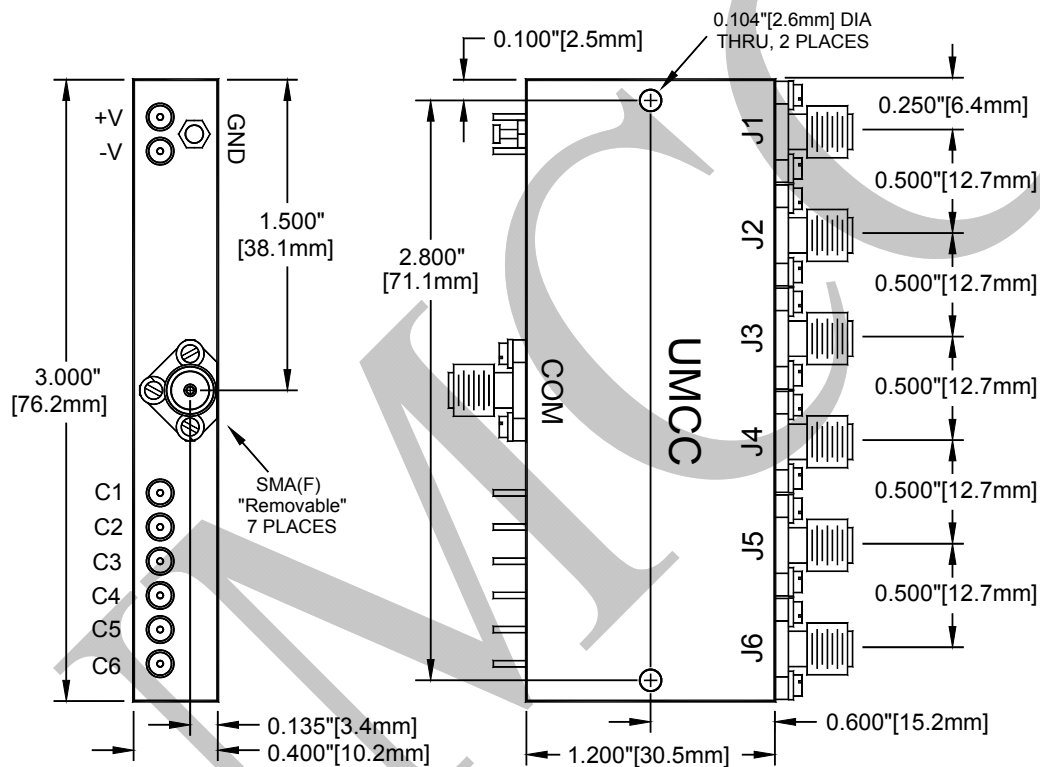


Weight	Tolerances
2.1 oz [59.5g]	±0.015" [±0.38mm]



Model: SR-DA3W-6S

Outline Drawing (SP6T with Option "F2")

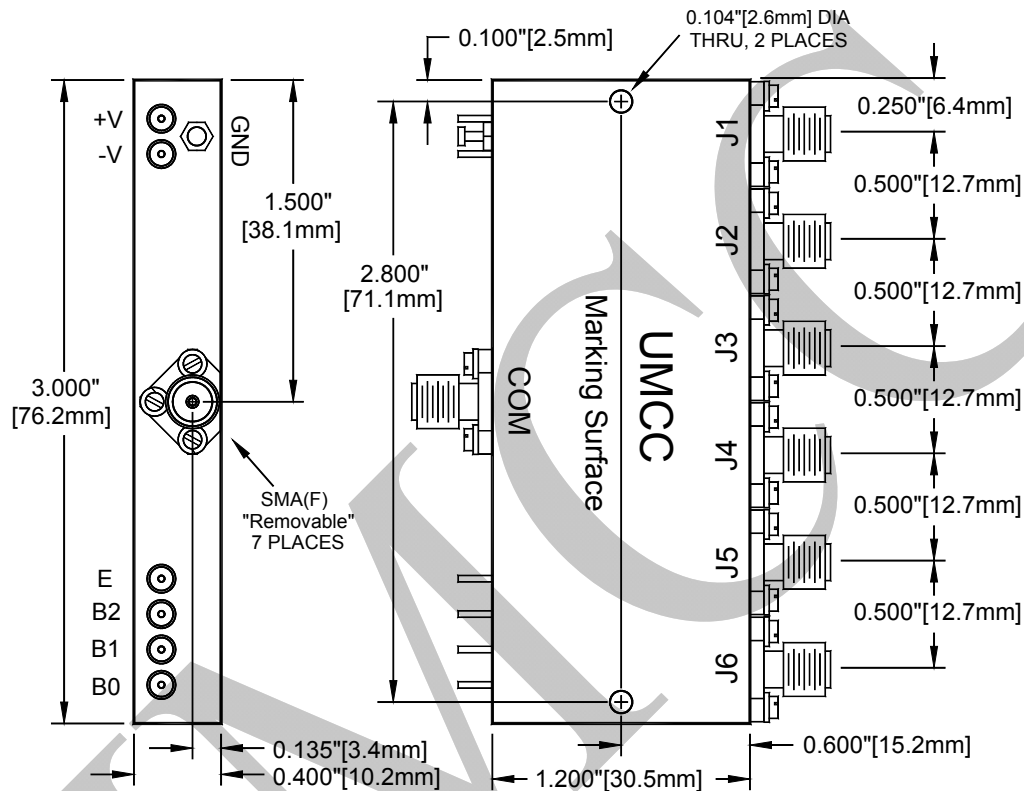

Weight	Tolerances
2.1 oz [59.5g]	±0.015" [±0.38mm]

Function Table for Option "F2" (3-Bit Binary Control + Enable)

INPUTS				RF PATH					
E	B2	B1	B0	J1	J2	J3	J4	J5	J6
0	0	0	0	ON	OFF	OFF	OFF	OFF	OFF
0	0	0	1	OFF	ON	OFF	OFF	OFF	OFF
0	0	1	0	OFF	OFF	ON	OFF	OFF	OFF
0	0	1	1	OFF	OFF	OFF	ON	OFF	OFF
0	1	0	0	OFF	OFF	OFF	OFF	ON	OFF
0	1	0	1	OFF	OFF	OFF	OFF	OFF	ON
1	X	X	X	OFF	OFF	OFF	OFF	OFF	OFF