



Fig. 22-S

The image contains two mechanical drawings of the UMCC module. The left drawing is a front view showing a rectangular module with a central label 'UMCC'. It features four mounting holes at the corners, each with a diameter of 0.125 inches [3.2mm]. The top and bottom edges are labeled 'J2' and 'J1' respectively. The right edge is labeled 'SUM'. Dimensions include a top width of 1.500 inches [38.1mm], a total height of 2.000 inches [50.8mm], a distance of 1.780 inches [45.2mm] from the top edge to the center of the 'SUM' connector, and a distance of 1.200 inches [30.48mm] from the bottom edge to the center of the 'SUM' connector. The right drawing is a side view showing the module's profile. It has a total height of 1.500 inches [38.1mm]. The top edge has a width of 0.870 inches [22.1mm] and a thickness of 0.435 inches [11.1mm]. The bottom edge has a thickness of 0.060 inches [1.5mm]. The 'SMA(F) 3 PLACES' connector is shown on the right side.

Model	Connector	Weight	Tolerances
PD-0020-2B	All BNC(f)	2.9oz [82.2g]	±0.015" [±0.38mm]

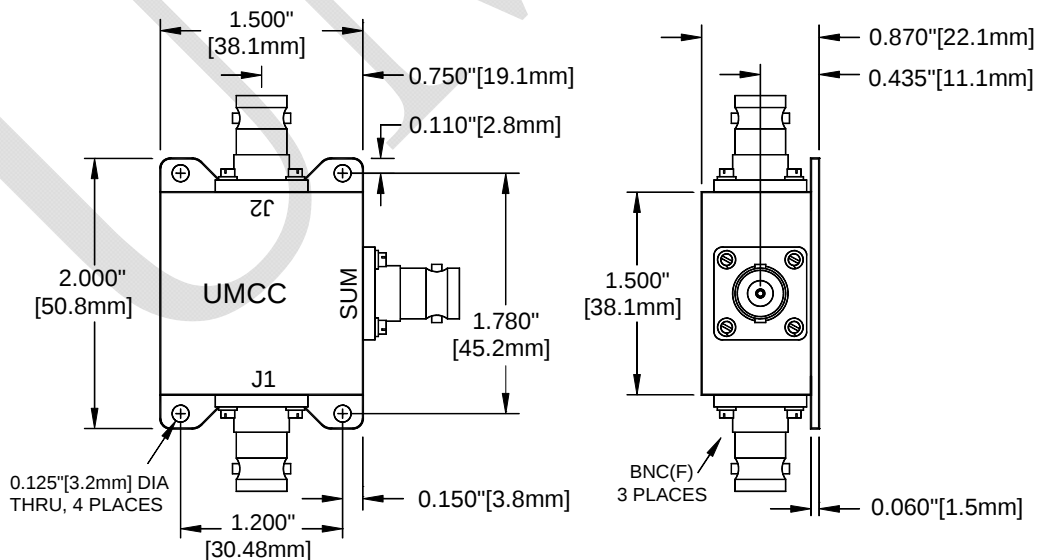


Fig. 22-N

Model	Connector	Weight	Tolerances
PD-0020-2N	All N(f)	4.0oz [113.4g]	$\pm 0.015"$ [$\pm 0.38\text{mm}$]

