



- Insertion Loss

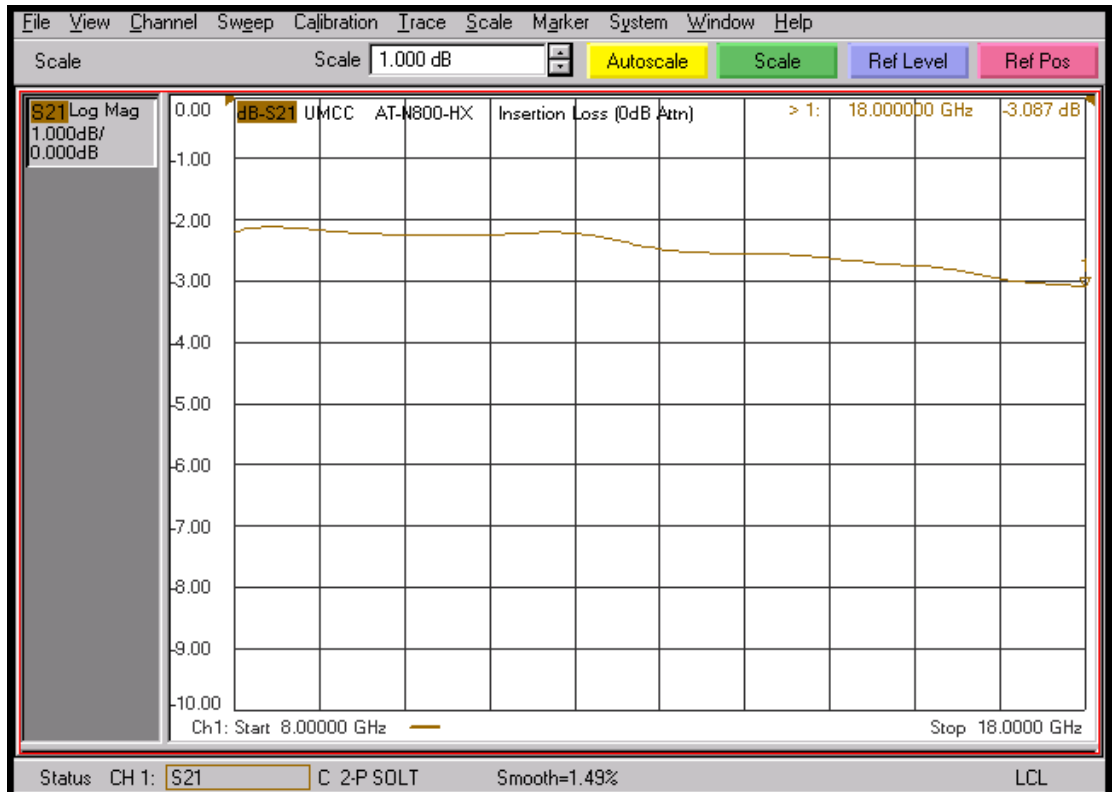

-Attenuation

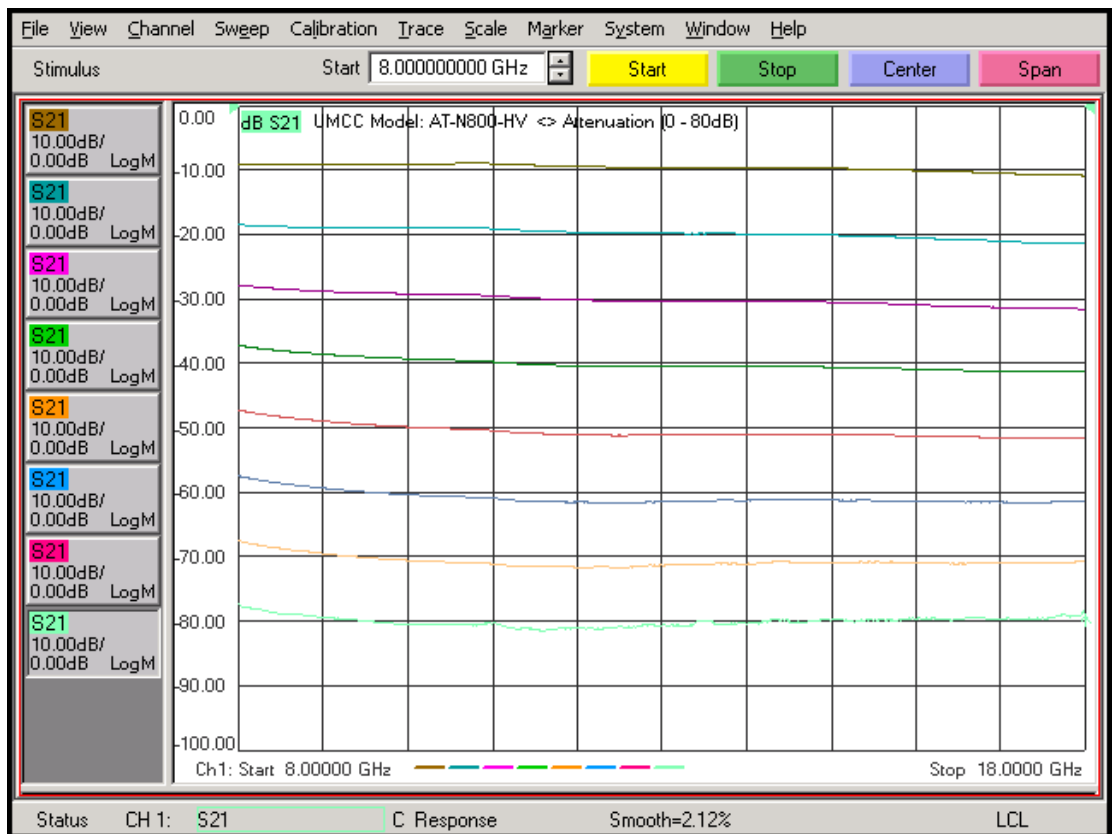


Model: AT-N800-HX

- Return Loss

Input / Output Return Loss @ 0dB Attn




Input / Output Return Loss @ 80dB Attn

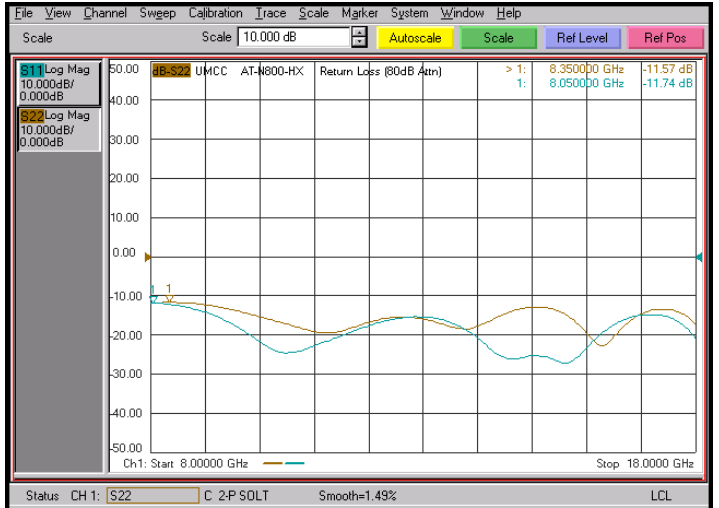


- Attenuation Response / Flatness

-Attenuation 10dB


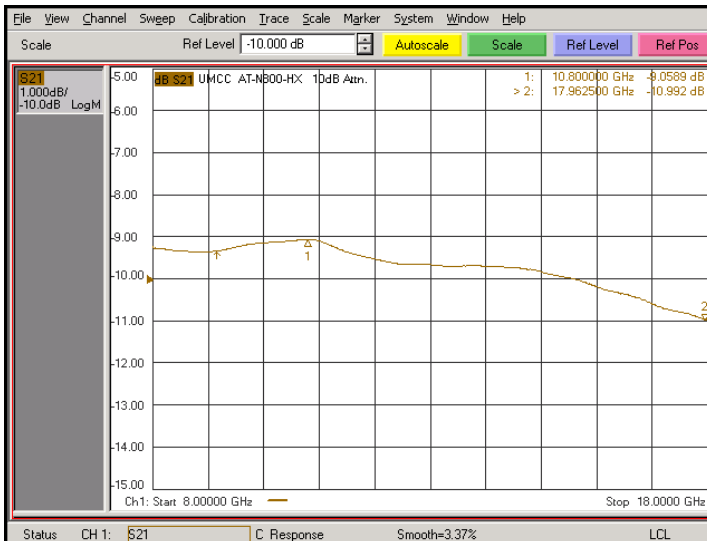


-Attenuation 20dB

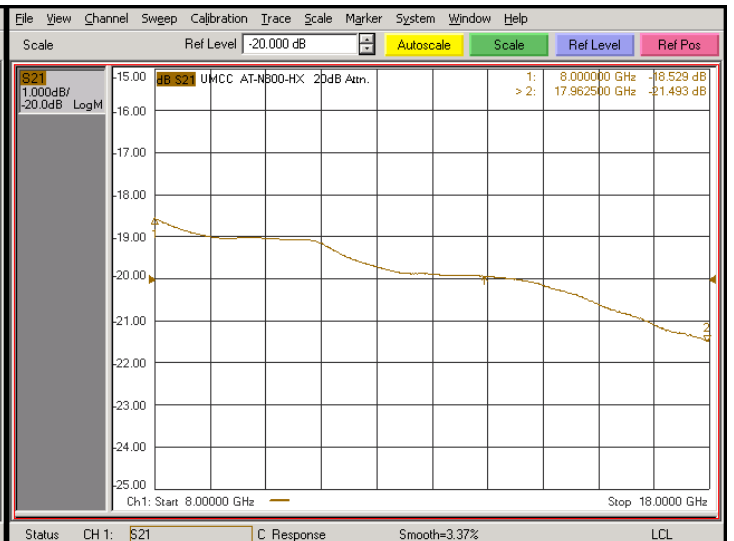



-Attenuation 30dB

-Attenuation 40dB

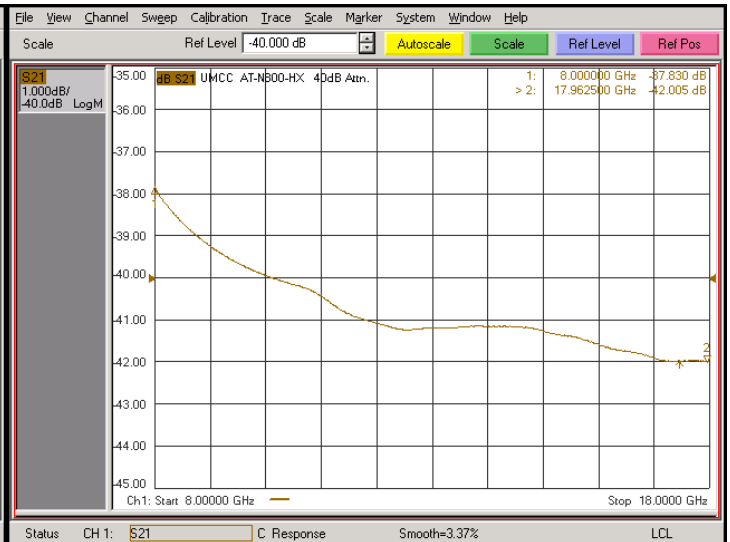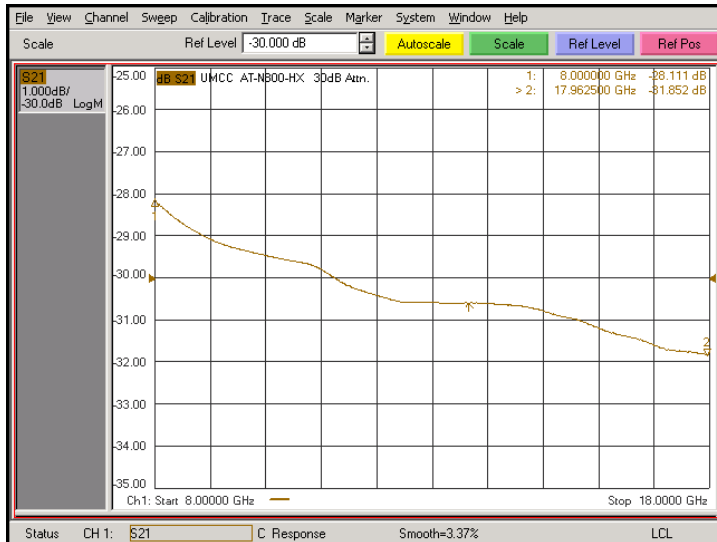



-Attenuation 50dB

-Attenuation 60dB

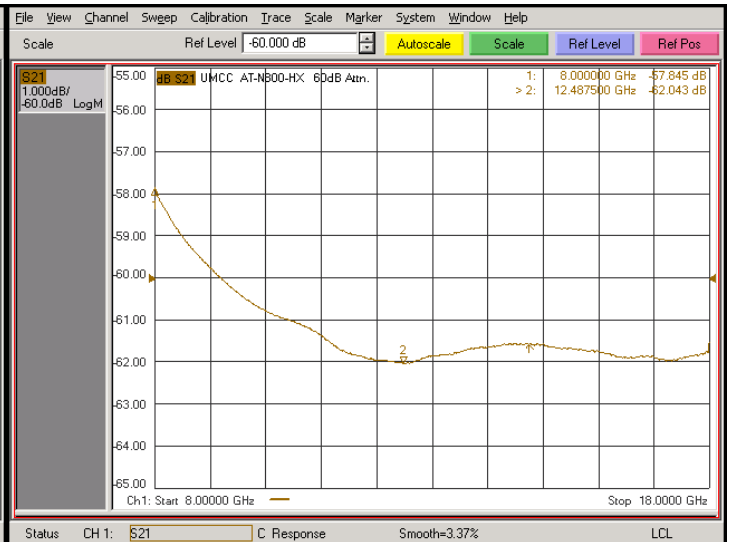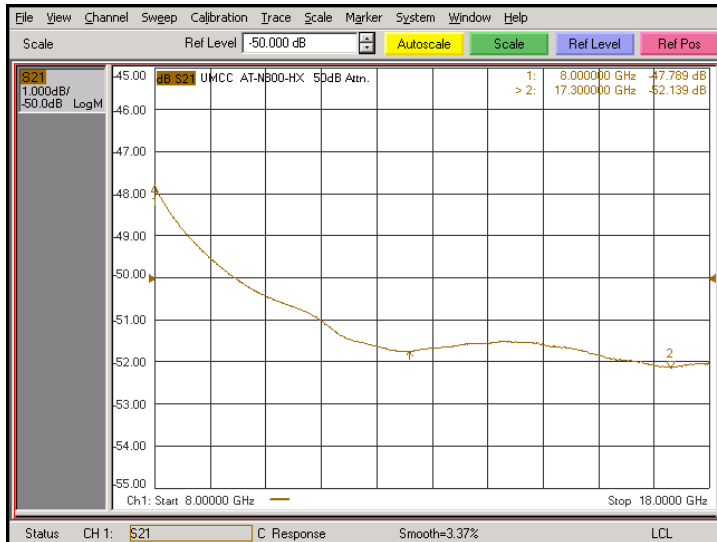

-Attenuation 70dB



-Attenuation 80dB

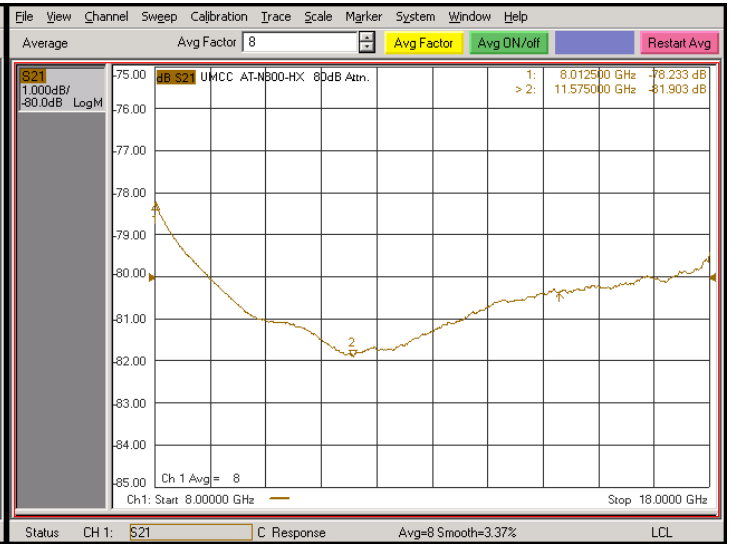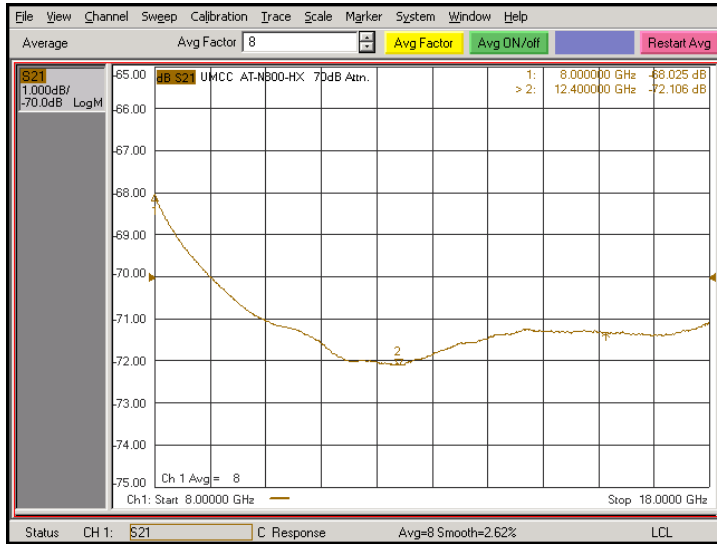

-Phase Shift


Phase Shift @ 10dB Attn.

Phase Shift @ 20dB Attn.

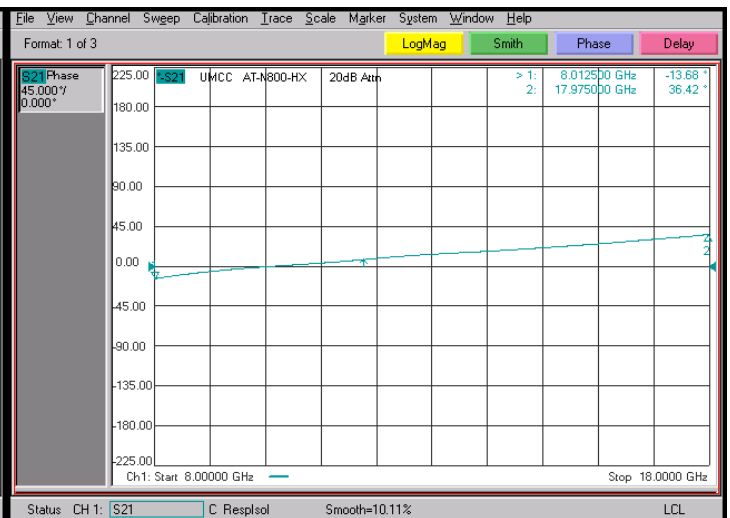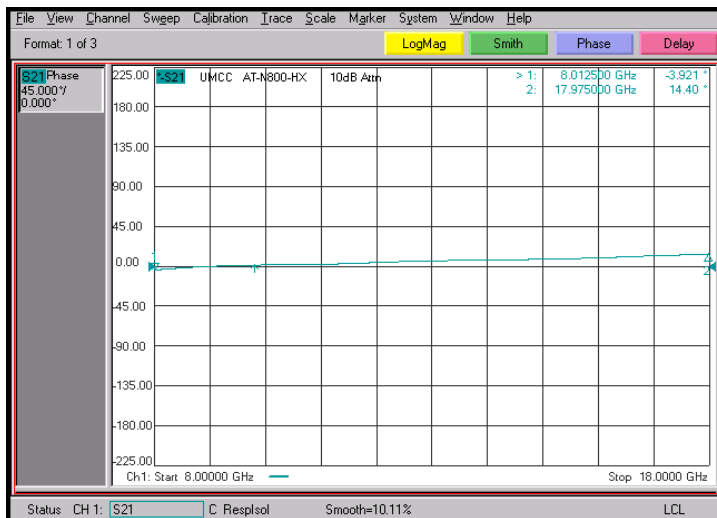


Phase Shift @ 30dB Attn.

Phase Shift @ 40dB Attn.

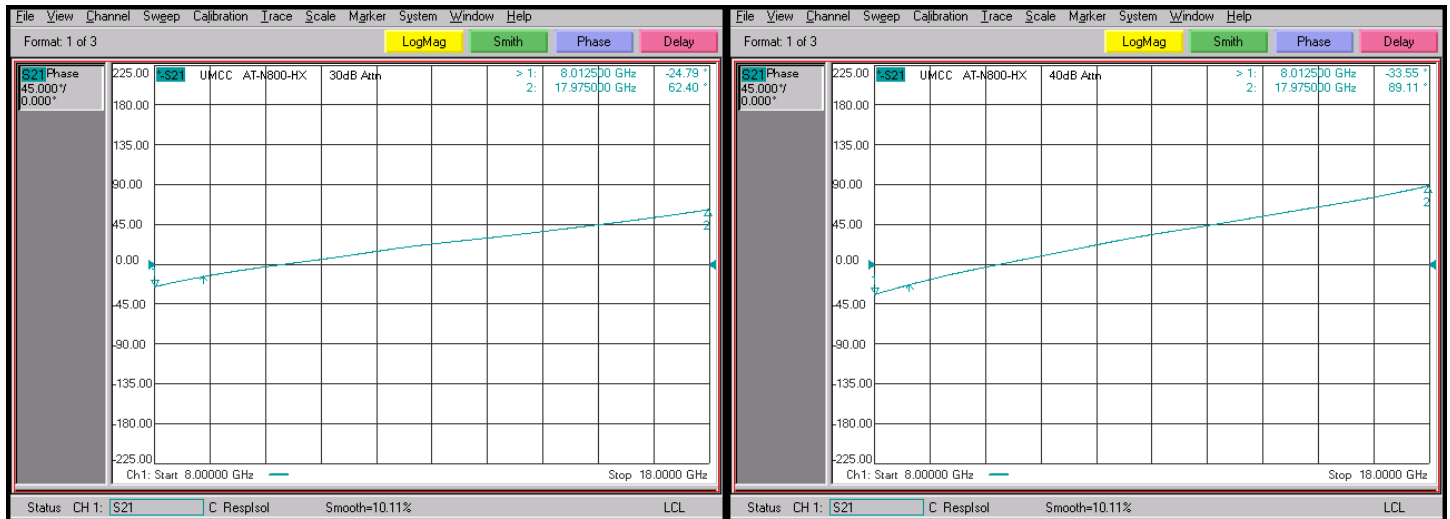

Phase Shift @ 50dB Attn.

Phase Shift @ 60dB Attn.

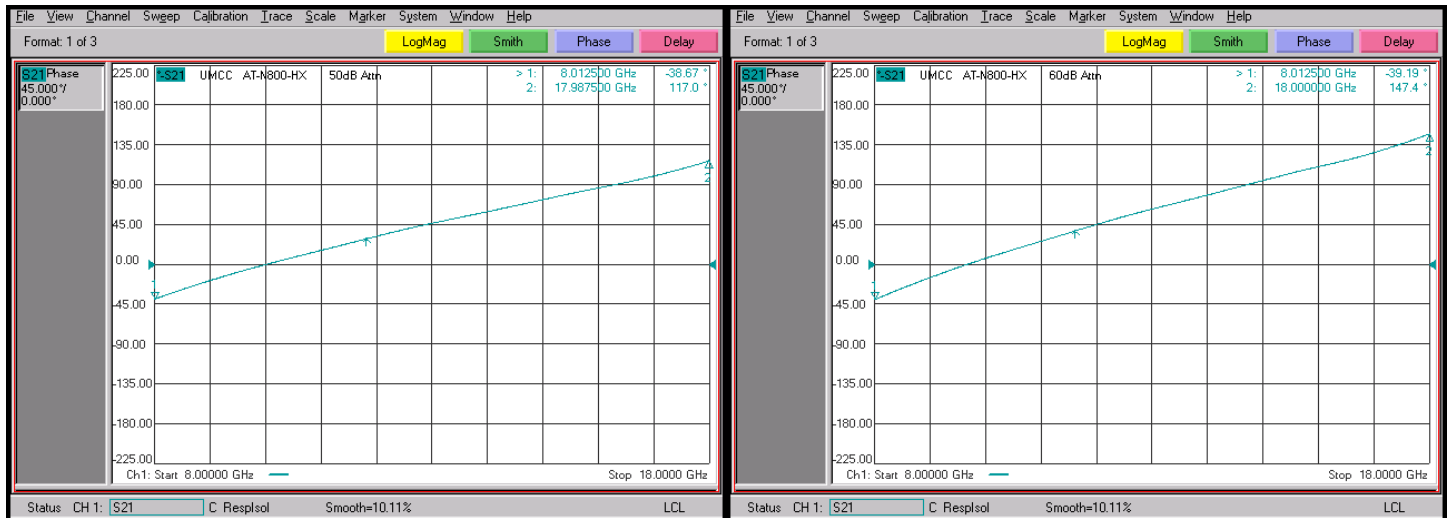

Phase Shift @ 70dB Attn.

Phase Shift @ 80dB Attn.

