




**Model: DC-6000-20S**

Description:.....	Directional Coupler
Operating Frequency:.....	0.5 – 5.8 GHz
Coupling (reference to input):.....	20 ± 1dB Nominal
Coupling Flatness:.....	± 0.8 dB Max
Insertion Loss (including coupled power):.....	0.7 dB Max
Directivity: .....	15 dB Min
VSWR: .....	Line..... 1.4:1 Max
.....	Couple..... 1.4:1 Max
Power Handling: .....	50W Cw/Avg, 1KW Peak
Connectors: .....	SMA (f)
Impedance:.....	50 Ohms Nominal
Quality:.....	Best-Commercial-Grade

**Environmental Ratings:**

Temperature:.....	{Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity: .....	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: .....	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: .....	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: .....	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: .....	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Outline**  
 ("A" = 6.150" [156.2mm])

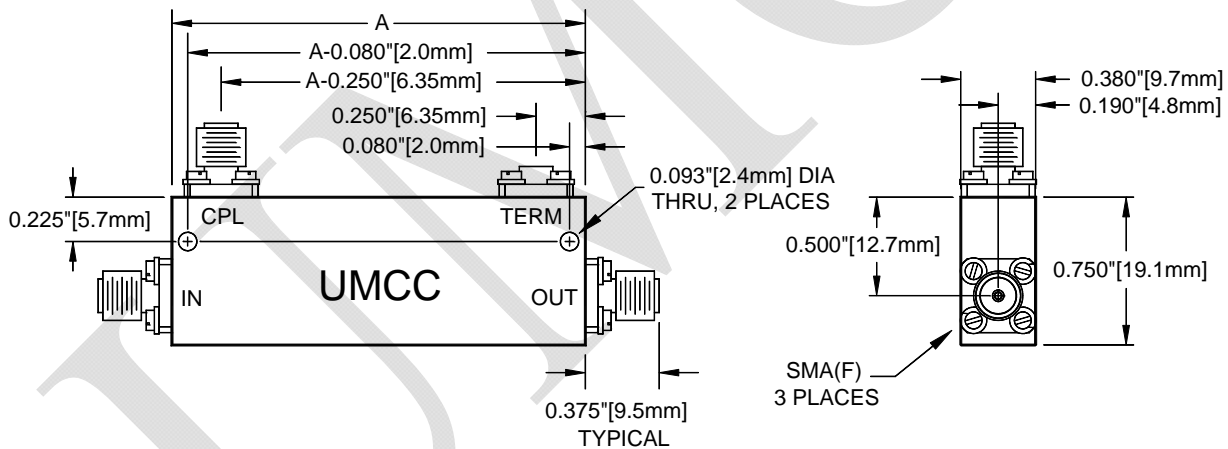

<b>Weight</b>
3.2 oz [ 90.7 g]