




Model: HC-W500-MS

Description:..... 180° / 3dB Hybrid Coupler
 Operating Frequency:..... 10 – 500 MHz
 Insertion Loss: 0.9 dB Max
 Amplitude Balance:..... ± 0.2 dB Max
 Isolation 0°/180° Ports..... 23 dB Min
 Sum/Diff Ports 27 dB Min
 VSWR: 1.40:1 Max
 Phase Error:..... ±4° Max
 Power Handling: 1W CW/Peak
 Connectors: SMA (f)
 Impedance: 50 Ohms Nominal
 Weight: 2.4oz [68g]
 Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
 Humidity: MIL-STD-202F, Method 103B Cond. B (96 hours at 95% R.H.)
 Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
 Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
 Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
 Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline

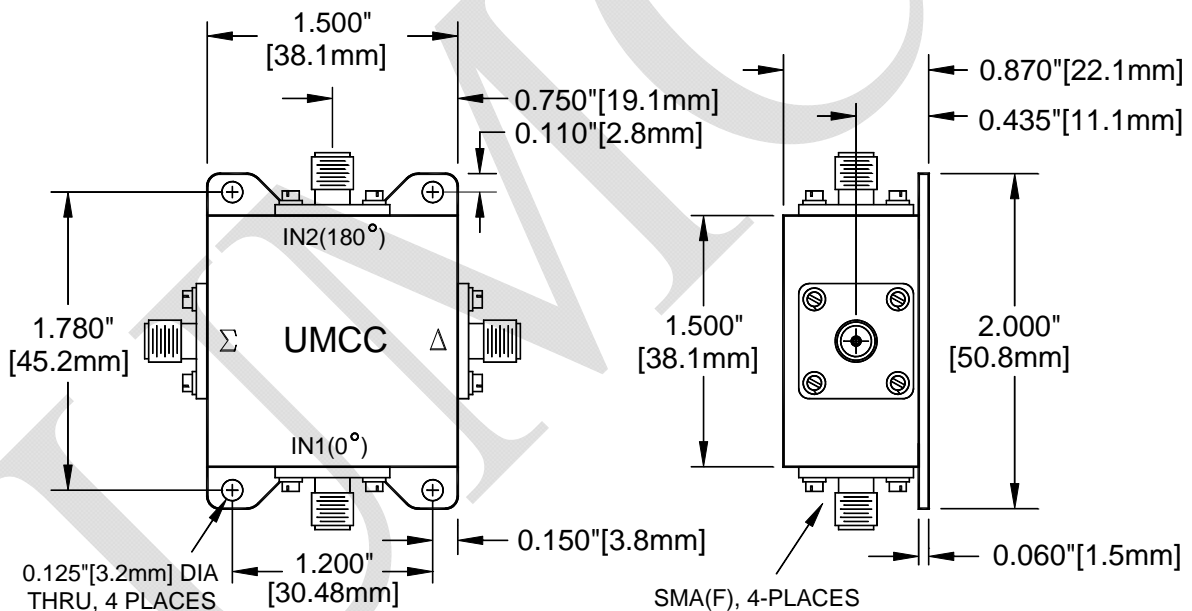

Phase / Ampl. Function Table		Signal Output			
		Δ	Σ	0°	180°
Signal Input	Δ	X	Iso.	-3dB∠0°	-3dB∠180°
	Σ	Iso.	X	-3dB∠0°	-3dB∠0°
	0°	-3dB∠0°	-3dB∠0°	X	Iso.
	180°	-3dB∠180°	-3dB∠0°	Iso.	X