



**Model: PD-0500-3S**

Description:..... 3-Way Power Divider  
 Operating Frequency:..... 1-500 MHz  
 Insertion Loss / Isolation / Amplitude Balance / Phase Balance:


Frequency	Insertion Loss	Isolation	Ampl. Bal.	Phase Bal.
1-200 MHz	0.8 dB Max	25 dB Min	±0.1 dB Max	±0.5° Max
200-500 MHz	1.2 dB Max	22 dB Min	±0.2 dB Max	±1.5° Max

VSWR: ..... Σ Port..... 1.35:1 Max  
 ..... Outputs..... 1.35:1 Max  
 Power Handling (@ SUM-Port): ..... Load VSWR=∞..... 2W AVG/CW Max  
 ..... Load VSWR <2:1..... 8W AVG/CW Max  
 Connectors: ..... SMA (f)  
 Impedance: ..... 50 Ohms Nominal  
 Quality: ..... Best-Commercial-Grade

**Environmental Ratings:**

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}  
 Humidity: ..... MIL-STD-202F, Method 103B Cond. B (96 hours at 95% R.H.)  
 Shock: ..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)  
 Vibration: ..... MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)  
 Altitude: ..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)  
 Temp. Shock: ..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Outline**

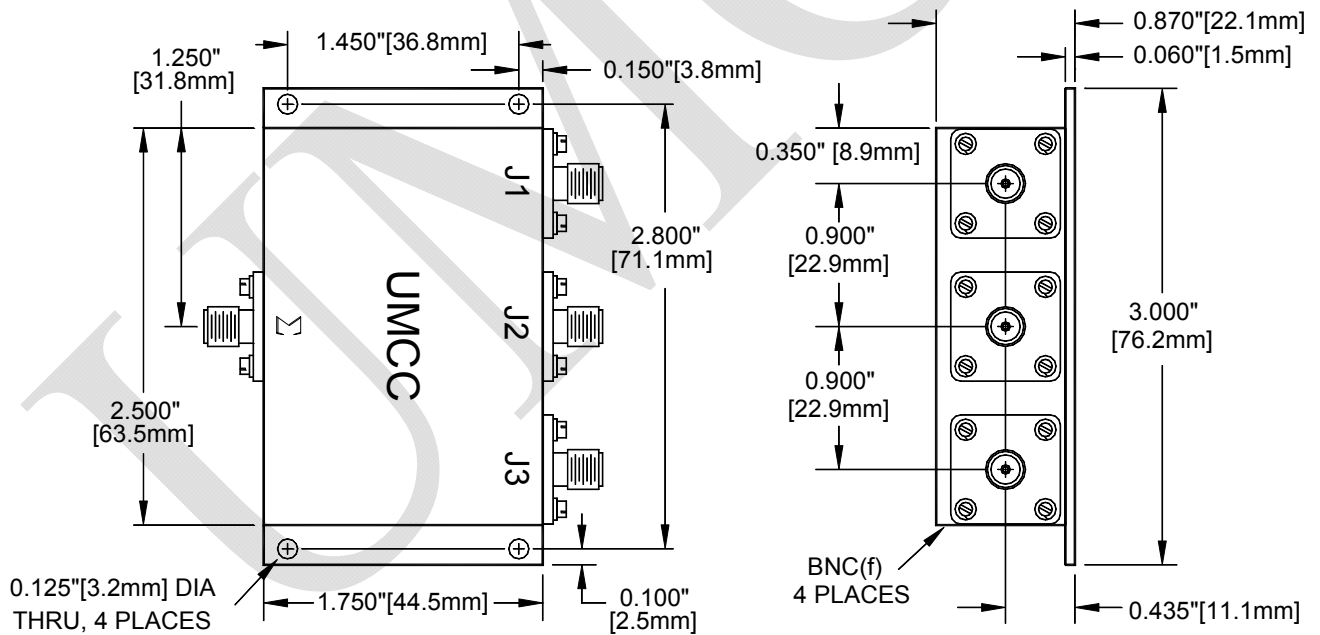

Weight
3.3 oz [ 93.6 g]