



Universal Microwave Components Corp.

5702-D General Washington Drive Alexandria, VA 22312 <> Web: www.umcc111.com

E-mail: sales@umcc111.com <> Tel: (703) 642-6332 <> Fax: (703) 642-2568

Model: PD-1000-3B

Description: 3-Way Power Divider

Operating Frequency: 10-1000 MHz

Insertion Loss / Amplitude Balance / Phase Balance:


Frequency	Insertion Loss	Ampl. Bal.	Phase Bal.
10-500 MHz	1.1 dB Max	±0.1 dB Max	±1.5° Max
500-1000 MHz	1.5 dB Max	±0.2 dB Max	±3° Max

Isolation: 19dB Min
VSWR: Σ Port 1.65:1 Max (1.75:1 over 10-30MHz)
..... Outputs 1.5:1 Max
Power Handling (@ Σ -Port): Load VSWR= ∞ 2W AVG/CW Max
..... Load VSWR <2:1 8W AVG/CW Max
Connectors: BNC (f)
Impedance: 50 Ohms Nominal
Quality: Best-Commercial-Grade

Environmental Ratings:

Temperature: {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline

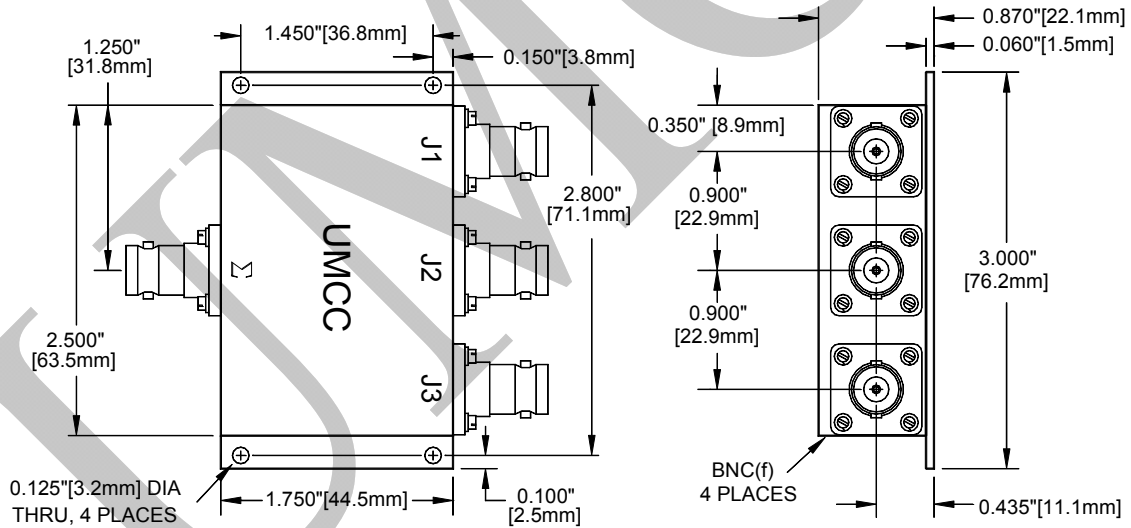

Weight	Tolerances
	± 0.015" [± 0.38 mm]