




**Model: PD-F000-3S**

Description:	3-Way Power Divider
Operating Frequency:	8 – 12.4 GHz
Insertion Loss:	0.7 dB Max
Isolation:	20 dB Min
VSWR:	$\Sigma$ Port 1.35:1 Max
	Outputs 1.35:1 Max
Amplitude Balance:	$\pm$ 0.2 dB Max
Phase Balance:	$\pm$ 3° Max
Power Handling (@ SUM Port):	Load VSWR= $\infty$ 1W AVG/CW Max
	Load VSWR <2:1 10W AVG/CW Max
Connectors:	SMA (f), Removable
Impedance:	50 Ohms Nominal
Quality:	Best-Commercial-Grade

**Environmental Ratings:**

Temperature:	{Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity:	MIL-STD-202F, Method 103B Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Outline**

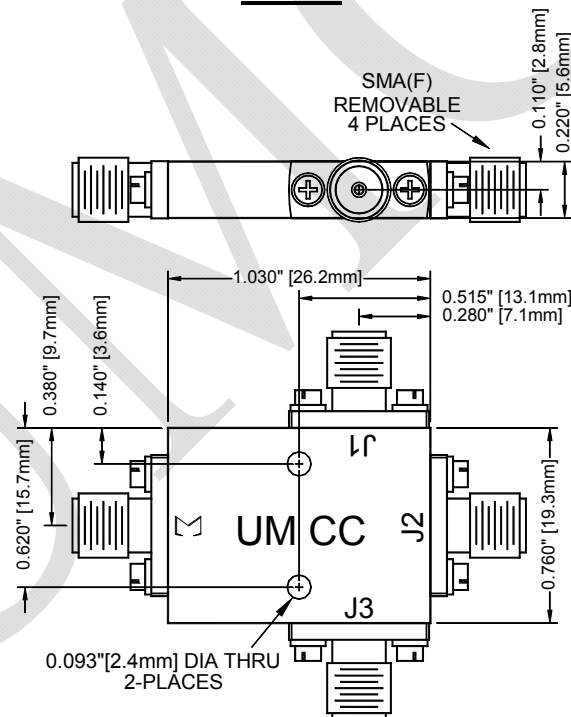

<b>Weight</b>
1.3 oz [ 36.9 g ]