



Model: PD-L000-6S


Description:..... 6-Way Power Divider
 Operating Frequency:..... 1.9 – 8.5 GHz
 Insertion Loss: 1.5 dB Max
 Isolation: 18 dB Min
 VSWR: Sum Port..... 1.55:1 Max
 Output Ports 1.45:1 Max
 Amplitude Balance:..... ± 0.3 dB Max
 Phase Balance:..... ± 4° Max
 Power Handling: Matched Loads:..... 10W CW/AVG Max
 Unmatched Loads: 1W CW/AVG Max
 Connectors: SMA (f), Removable
 Impedance: 50 Ohms Nominal
 Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
 Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
 Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
 Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
 Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
 Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline

(A = 3.500" [88.9mm])

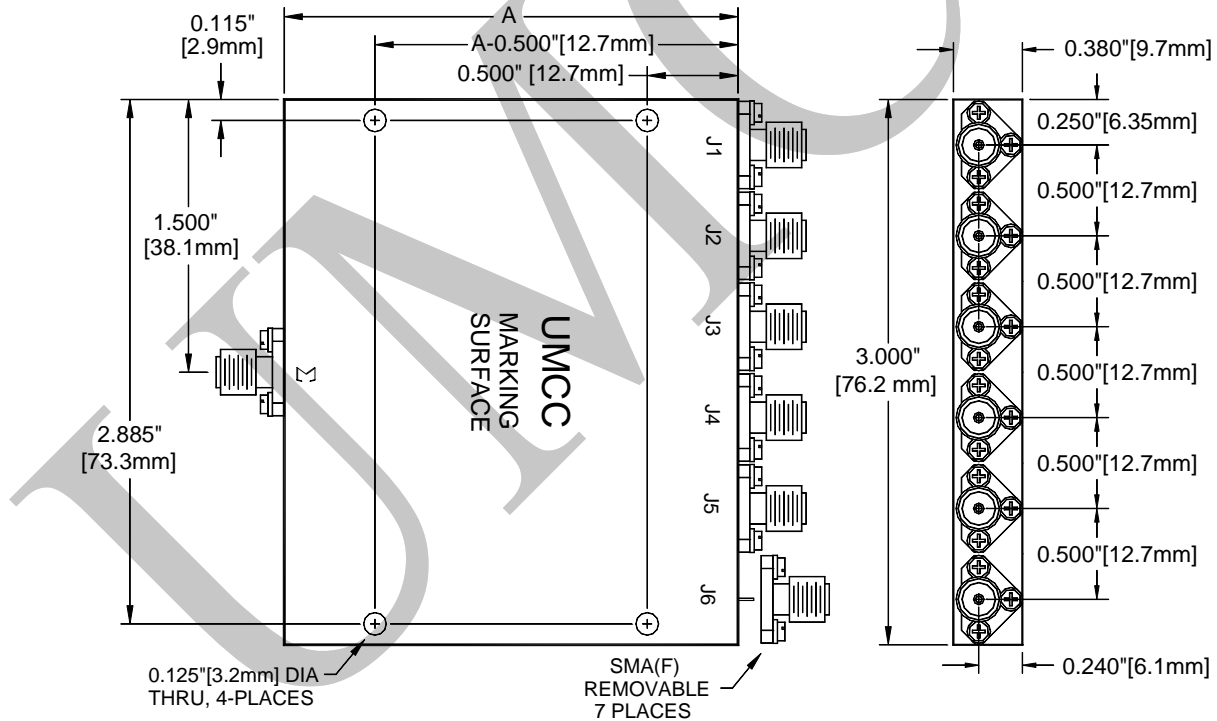

Weight	Tolerances
6.2 oz [193 g]	±0.015" [±0.38mm]