



## Model: SR-J410-4S

Description: ..... SP4T, Absorptive, PIN-Switch  
Operating Frequency: ..... 0.4 - 14 GHz  
Insertion Loss: ..... 2.6 dB Max  
Isolation (Arm-to-Arm):

0.4 – 12.4 GHz	12.4 – 14 GHz
60 dB Min	55 dB Min

VSWR (RF Path “ON” or “OFF”): ..... 1.7:1 Max  
Rise/Fall time (10% to 90% RF, 90% to 10% RF): ..... 25 ns Max  
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF): ..... 60 ns Max  
Operating Power: ..... CW & AVG ..... +27dBm Max\*  
..... \* ..... (+24dBm Max into “JX” Port @ Off-State)  
..... Peak: ..... 5W @ 1μs PW & 10% Duty-Cycle  
MaxControl Input Characteristics: ..... Std. TTL / Unit-Load / Floating-High  
Control Logic: ..... 4-Controls, Logic “0” = RF Path “ON”  
Power Supplies: ..... +5(±0.25)V @ 140mA Max  
..... -12(±0.5)V @ 70mA Max  
Connectors (RF): ..... SMA (f), Removable  
Connectors (Supplies/Controls) ..... Solder Pins  
Impedance: ..... 50 Ω Nominal  
Quality: ..... Best-Commercial-Grade

### Environmental Ratings:

Temperature: ..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}  
Humidity: ..... MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)  
Shock: ..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)  
Vibration: ..... MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)  
Altitude: ..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)  
Temp. Shock: ..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

### Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

#### ■ Supply Voltages

- A1 [ +5(±0.25)V / -5(±0.25)V ] \*
- A2 [ +5(±0.25)V / -15(±0.5)V ]
- A3 [ +12(±0.5)V / -12(±0.5)V ]
- A4 [ +15(±0.5)V / -15(±0.5)V ]

#### ■ RF Connectors

- B1 [ J1 – J4 Ports with SMA(M) ]
- B2 [ All SMA (M) ]
- B3 [ COM Port with SMA(M) ]

#### ■ Control Function

- F1 [ Inverse Logic, (“1” = Path “ON”) ]
- F2 [ 2-Bit Binary Controls + Enable ] ; see below for “Outline Drawing” and “Function Table”

#### ■ Video Suppression Filter


- G1 [ VF @ COM Port <> 0.25 dB additional Loss ]
- G2 [ VF @ J1 – J4 Ports <> 0.25 dB additional Loss ]
- G3 [ VF @ All Ports <> 0.5 dB additional Loss ]

\* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SR-J410-4S

### Outline

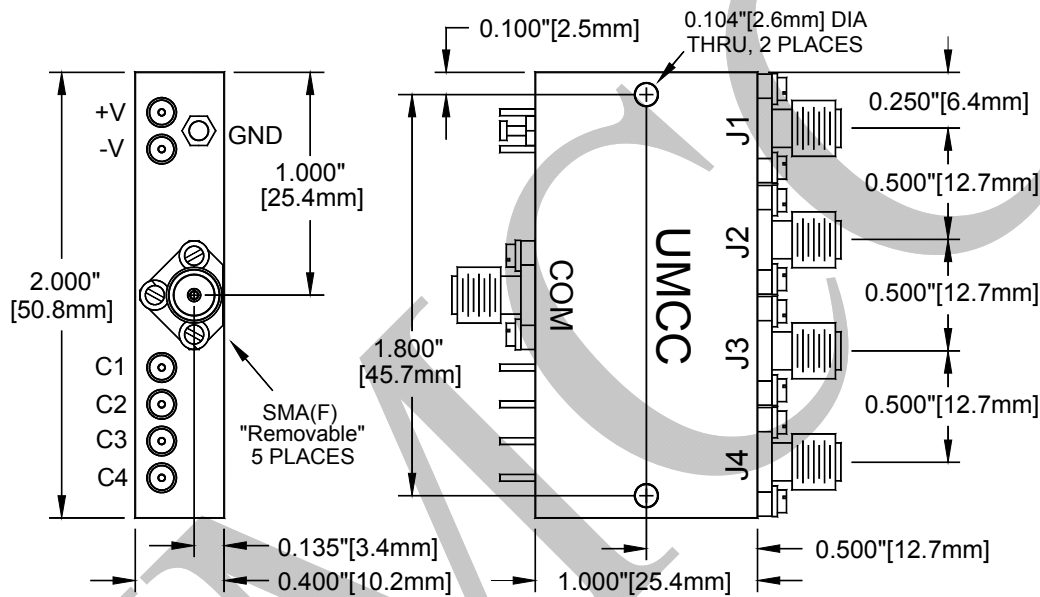


Weight	Tolerances
1.3 oz [36.9g]	±0.015" [±0.38mm]



Model: SR-J410-4S

**Outline Drawing (SP4T with Option "F2")**

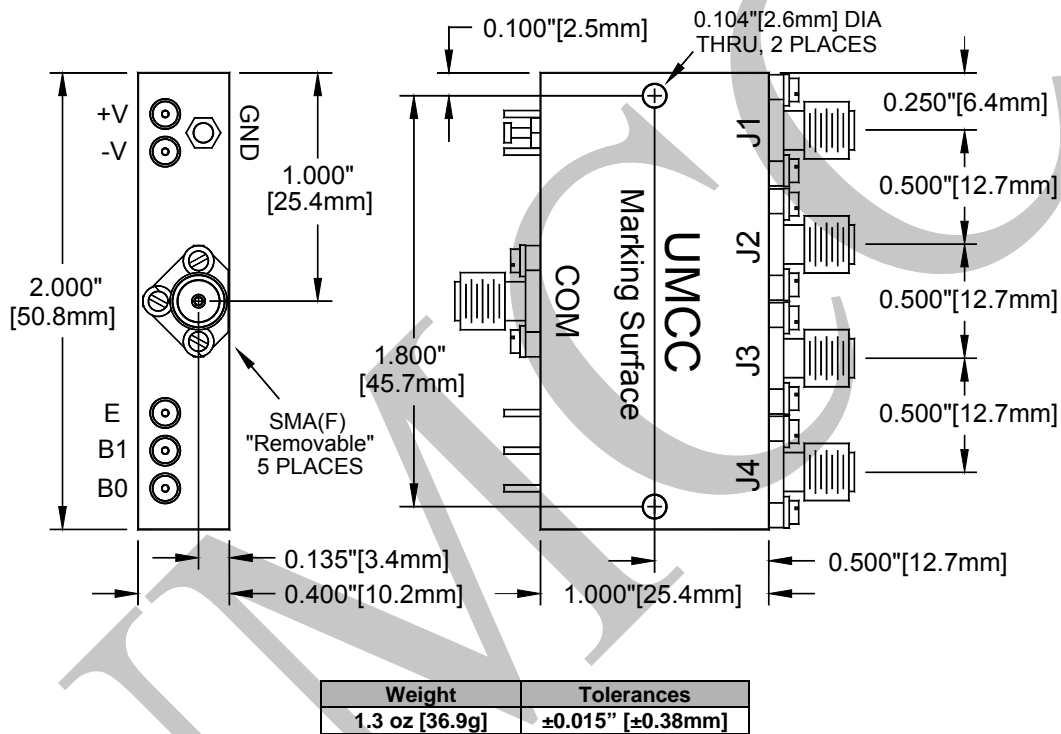

**Function Table for Option "F2" (2-Bit Binary Control + Enable)**

INPUTS			RF PATH			
E	B1	B0	J1	J2	J3	J4
1	0	0	ON	OFF	OFF	OFF
1	0	1	OFF	ON	OFF	OFF
1	1	0	OFF	OFF	ON	OFF
1	1	1	OFF	OFF	OFF	ON
0	X	X	OFF	OFF	OFF	OFF