



Model: SR-S01W-5S

Description:..... SP5T, Absorptive, PIN-Switch

Operating Frequency:..... 2 – 18 GHz

Insertion Loss:..... 3.2 dB Max

Isolation (Arm-to-Arm):

2 – 6 GHz	6 – 12 GHz	12 – 18 GHz
90 dB Min	80 dB Min	70 dB Min

VSWR (RF Path “ON” or “OFF”):..... 1.9:1 Max

Rise/Fall time (10% to 90% RF, 90% to 10% RF):... 150 ns Max

On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):..... 250 ns Max

Operating Power:..... CW & AVG..... +27dBm Max *

..... *..... (+24dBm Max into “JX” Port @ Off-State)

..... Peak:..... 5W @ 1μs PW & 10% Duty-Cycle Max

Control Input Characteristics:..... Std. TTL / Unit-Load / Floating-High

Control Logic:..... 5-Controls, Logic “0” = RF Path “ON”

Power Supplies:..... +5(±0.25)V @ 140mA Max

..... -12(±0.5)V @ 70mA Max

Connectors (RF):..... SMA (f), Removable

Connectors (Supplies/Controls)..... Solder Pins

Impedance:..... 50 Ohms Nominal

Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}

Humidity:..... MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)

Shock:..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)

Vibration:..... MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)

Altitude:..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)

Temp. Shock:..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

A1 [+5(±0.25)V / -5(±0.25)V] *

A2 [+5(±0.25)V / -15(±0.5)V]

A3 [+12(±0.5)V / -12(±0.5)V]

A4 [+15(±0.5)V / -15(±0.5)V]

■ **Control Function**

F1 [Inverse Logic, (“1” = Path “ON”)]

F2 [3-Bit Binary Controls + Enable] ; see below for
“Outline Drawing” and “Function Table”

■ **Video Suppression Filter**

G1 [VF @ COM Port <> 0.25 dB additional Loss]

G2 [VF @ J1 – J5 Ports <> 0.25 dB additional Loss]

G3 [VF @ All Ports <> 0.5 dB additional Loss]

■ **RF Connectors**

B1 [J1 – J5 Ports with SMA(M)]

B2 [All SMA (M)]


B3 [COM Port with SMA(M)]

* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SR-S01W-5S

Outline

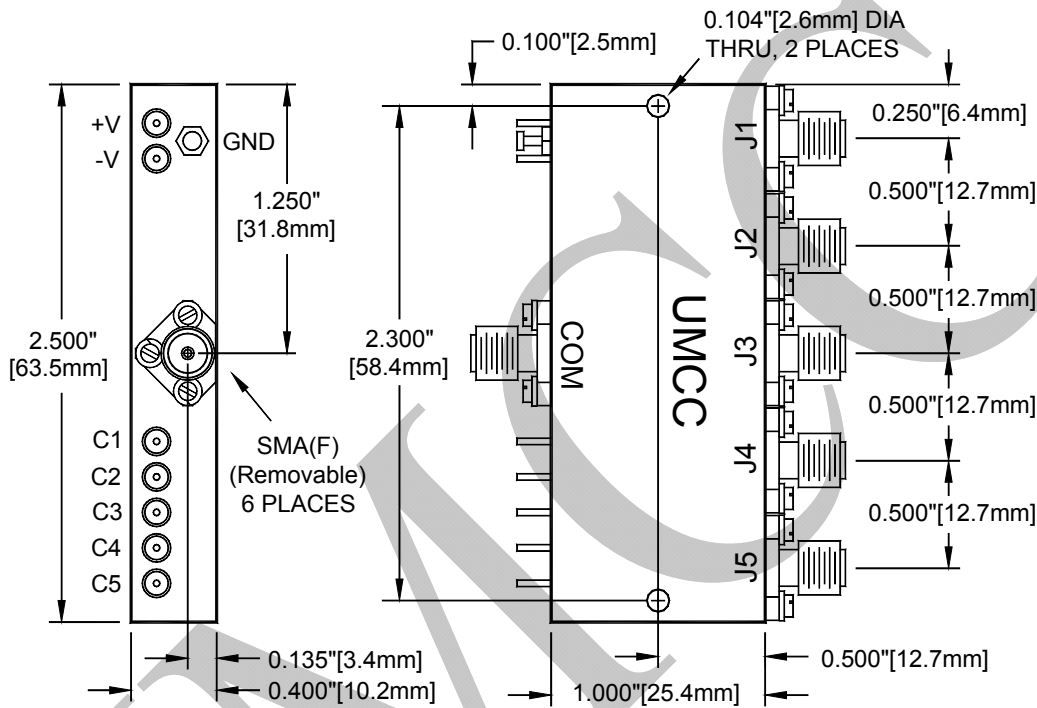


Weight	Tolerances
1.6 oz [45.4g]	±0.015" [±0.38mm]



Model: SR-S01W-5S

Outline Drawing (SP5T with Option "F2")

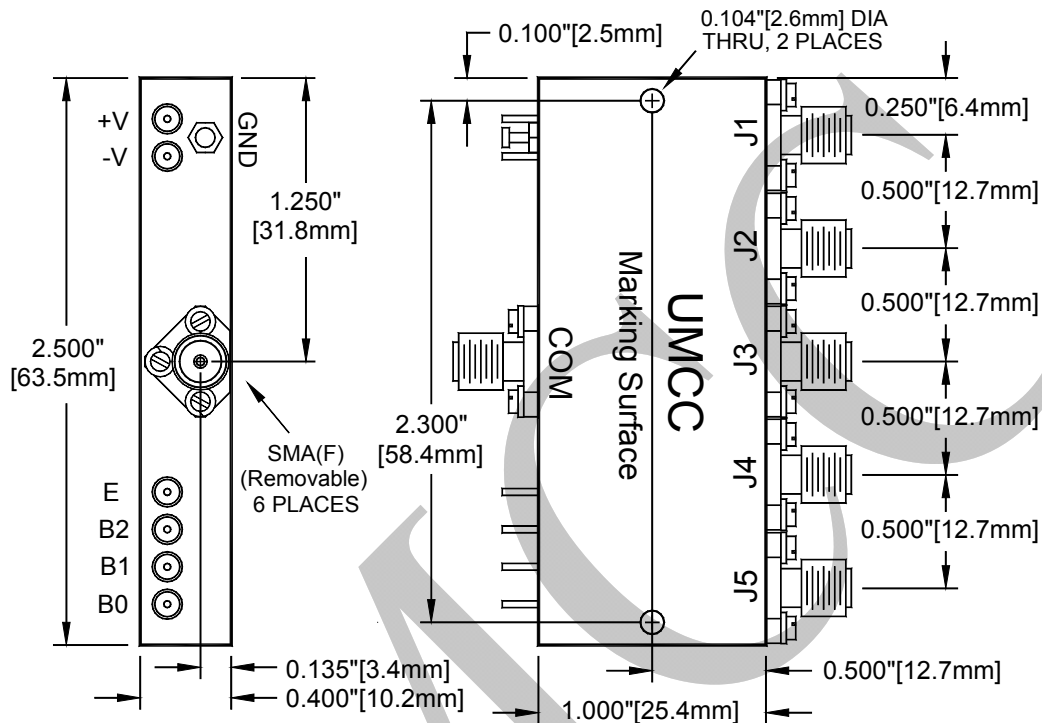

Weight	Tolerances
1.6 oz [45.4g]	±0.015" [±0.38mm]

Function Table for Option "F2" (3-Bit Binary Control + Enable)

INPUTS				RF PATH				
E	B2	B1	B0	J1	J2	J3	J4	J5
1	0	0	0	ON	OFF	OFF	OFF	OFF
1	0	0	1	OFF	ON	OFF	OFF	OFF
1	0	1	0	OFF	OFF	ON	OFF	OFF
1	0	1	1	OFF	OFF	OFF	ON	OFF
1	1	0	0	OFF	OFF	OFF	OFF	ON
0	X	X	X	OFF	OFF	OFF	OFF	OFF