



Model: SW-P04W-6S

Description: SP6T, Reflective, PIN-Switch
Operating Frequency: 2 - 20 GHz
Insertion Loss: 3.7 dB Max
Isolation:

Table with 2 columns: Frequency Range (2-8 GHz, 8-20 GHz) and Isolation (80 dB Min, 75 dB Min)

VSWR ("ON" RF paths): 1.9:1 Max
Rise/Fall time (10% to 90% RF, 90% to 10% RF): 350 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF): 400 ns Max
Phase Balance (Deviation from Median): +/- 7 degrees max
Operating Power: CW&AVG: +27dBm Max, Peak: 5W @ 1uS PW & 10% Duty-Cycle Max
Control Input Characteristics: Std. TTL / Unit-Load / Floating-High
Control Logic: 6-Controls, Logic "0" = RF Path "ON"
Power Supplies: +5(+/-0.25)V @ 70mA Max, -12(+/-0.5)V @ 70mA Max
Connectors (RF): SMA (f), Removable
Connectors (Supplies/Controls): Solder Pins
Impedance: 50 Ohms Nominal
Quality: Best-Commercial-Grade

Environmental Ratings:

Temperature: {Operating: -55C to +95C} & {Storage: -60C to +110C}
Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

Supply Voltages

- A1 [+5(+/-0.25)V / -5(+/-0.25)V] \*
A2 [+5(+/-0.25)V / -15(+/-0.5)V]
A3 [+12(+/-0.5)V / -12(+/-0.5)V]
A4 [+15(+/-0.5)V / -15(+/-0.5)V]

RF Connectors

- B1 [ J1 - J6 Ports with SMA(M) ]
B2 [ All SMA (M) ]
B3 [ COM Port with SMA(M) ]

Control Function

- F1 [ Inverse Logic, ("1" = Path "ON") ]

Video Suppression Filter


- G1 [ VF @ COM Port <> 0.25 dB additional Loss ]
G2 [ VF @ J1 - J6 Ports <> 0.25 dB additional Loss ]
G3 [ VF @ All Ports <> 0.5 dB additional Loss ]

\* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SW-P04W-6S

**Outline**

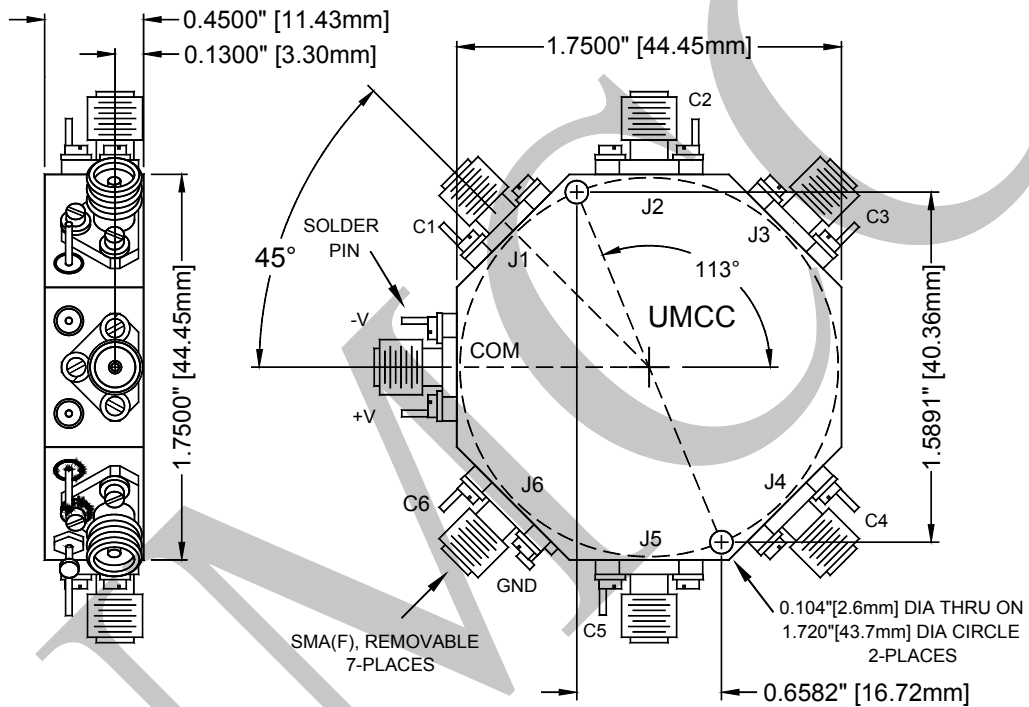

Weight	Tolerances
1.80 oz [51.0g]	±0.015" [±0.38mm]