



Model: SW-V010-6S

Description: SP6T, Absorptive, PIN-Switch

Operating Frequency: 0.1 – 18 GHz

Insertion Loss: 3.8 dB Max

Isolation:

0.1 – 14 GHz	14 – 18 GHz
80 dB Min	75 dB Min

VSWR ("ON" paths & "OFF" ports): 1.9:1 Max

Rise/Fall time (10% to 90% RF, 90% to 10% RF): ... 250 ns Max

On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF): 300 ns Max

Phase Balance (Deviation from Median): $\pm 6^\circ$ max

Operating Power: CW & AVG +27dBm Max *

..... * (+24dBm Max into "JX" Port @ Off-State)

..... Peak: 5W @ 1 μ S PW & 10% Duty-Cycle Max

Control Input Characteristics: Std. TTL / Unit-Load / Floating-High

Control Logic: 6-Controls, Logic "0" = RF Path "ON"

Power Supplies: +5(± 0.25)V @ 170mA Max

..... -12(± 0.5)V @ 70mA Max

Connectors (RF): SMA (f), Removable

Connectors (Supplies/Controls) Solder Pins

Impedance: 50 Ohms Nominal

Quality: Best-Commercial-Grade

Environmental Ratings:

Temperature: {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}

Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)

Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)

Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)

Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)

Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ Supply Voltages

A2 [+5(± 0.25)V / -15(± 0.5)V]

A3 [+12(± 0.5)V / -12(± 0.5)V]

A4 [+15(± 0.5)V / -15(± 0.5)V]

■ RF Connectors

B1 [J1 – J6 Ports with SMA(M)]

B2 [All SMA (M)]

B3 [COM Port with SMA(M)]


■ Control Function

F1 [Inverse Logic, ("1" = Path "ON")]



Model: SW-V010-6S

Outline

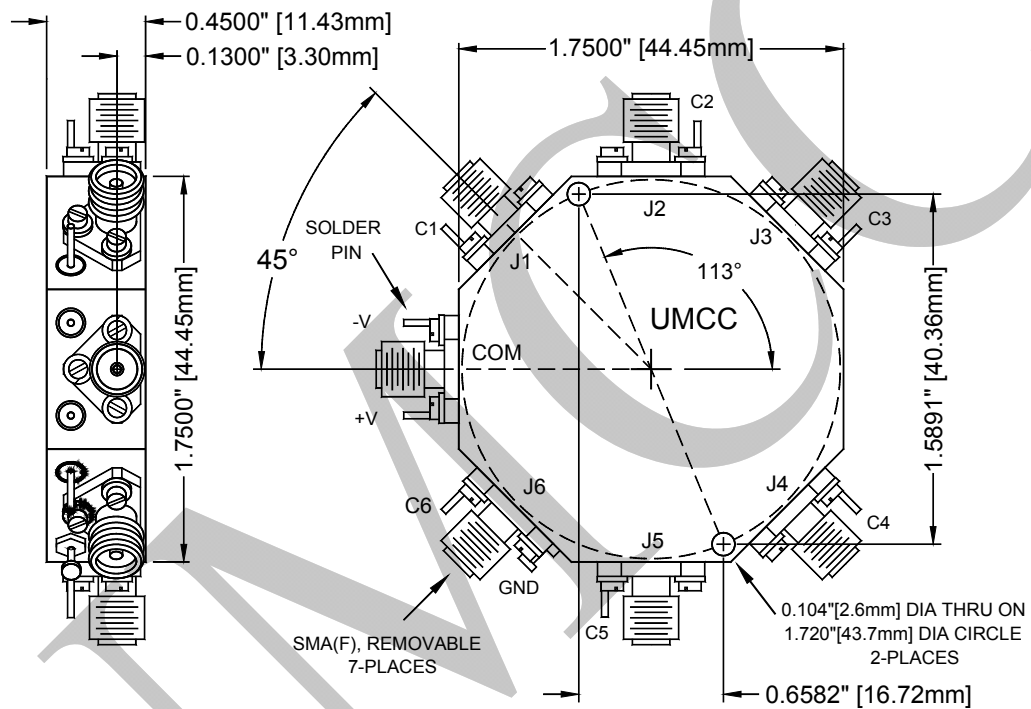

Weight	Tolerances
1.80 oz [51.0g]	±0.015" [±0.38mm]