



Model: SR-S01W-8S

Description:..... SP8T, Absorptive, PIN-Switch
 Operating Frequency:..... 2 – 18 GHz
 Insertion Loss: 3.8 dB Max
 Isolation:

| | |
|------------|------------|
| 2 – 14 GHz | 14 –18 GHz |
| 80 dB Min | 75 dB Min |

VSWR (RF Path “ON” or “OFF”): 1.9:1 Max
 Rise/Fall time (10% to 90% RF, 90% to 10% RF): ... 250 ns Max
 On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):..... 300 ns Max
 Operating Power:..... CW & AVG..... +27dBm Max *
 * (+24dBm Max into “JX” Port @ Off-State)
 Peak: 5W @ 1µS PW & 10% Duty-Cycle Max
 Control Input Characteristics: Std. TTL / Unit-Load / Floating-High
 Control Logic:..... 8-Controls, Logic “0” = RF Path “ON”
 Power Supplies:..... +5(±0.25)V @ 260mA Max
 -12(±0.5)V @ 100mA Max
 Connectors (RF):..... SMA (f), Removable
 Connectors (Supplies/Controls) Solder Pins
 Impedance:..... 50 Ohms Nominal
 Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
 Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
 Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
 Vibration: MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)
 Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
 Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [+5(±0.25)V / -5(±0.25)V] *
- A2 [+5(±0.25)V / -15(±0.5)V]
- A3 [+12(±0.5)V / -12(±0.5)V]
- A4 [+15(±0.5)V / -15(±0.5)V]

■ **Control Function**

- F1 [Inverse Logic, (“1” = Path “ON”)]
- F2 [3-Bit Binary Controls + Enable] ; see below for “Outline Drawing” and “Function Table”

■ **RF Connectors**

- B1 [J1 – J8 Ports with SMA(M)]
- B2 [All SMA (M)]
- B3 [COM Port with SMA(M)]

■ **Video Suppression Filter**


- G1 [VF @ COM Port <> 0.25 dB additional Loss]
- G2 [VF @ J1 – J8 Ports <> 0.25 dB additional Loss]
- G3 [VF @ All Ports <> 0.5 dB additional Loss]

* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SR-S01W-8S

Outline

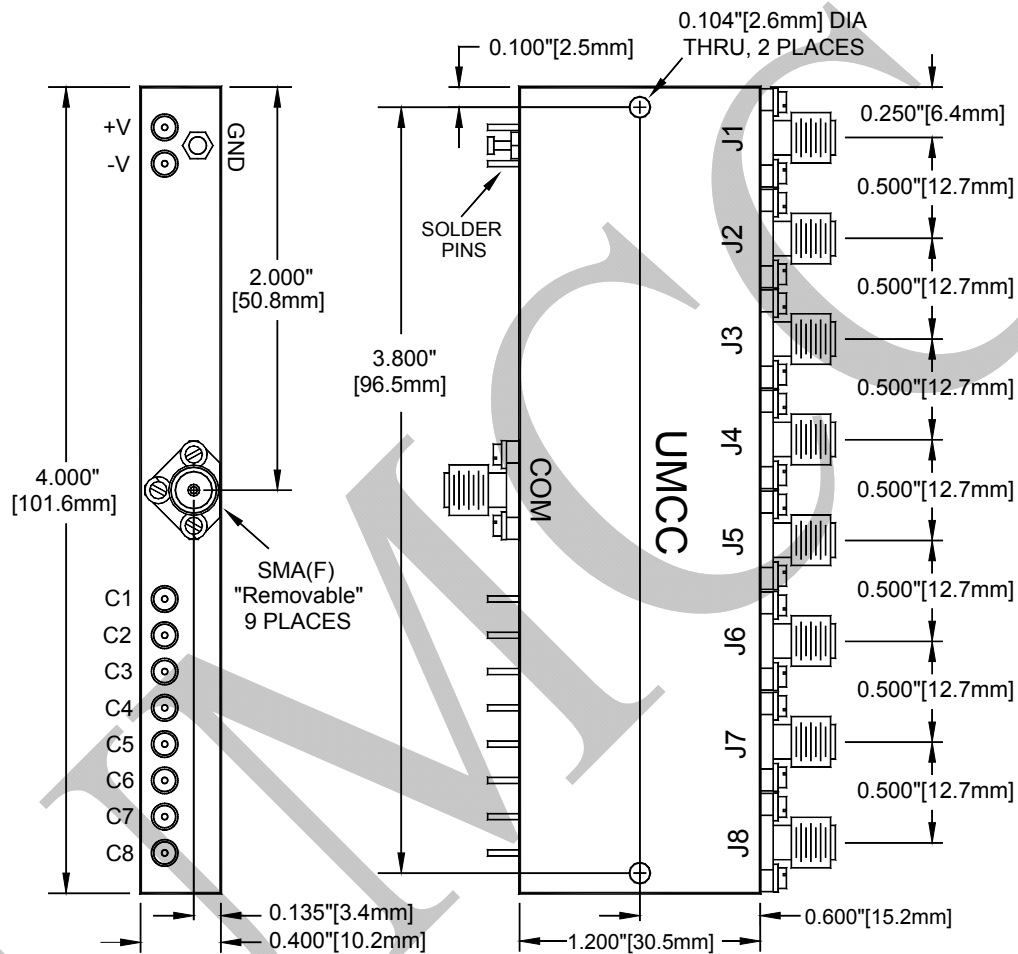


| Weight | Tolerances |
|----------------|-------------------|
| 2.8 oz [79.4g] | ±0.015" [±0.38mm] |



Model: SR-S01W-8S

Outline (Option "F2" for 3-Bit Binary Control + Enable)

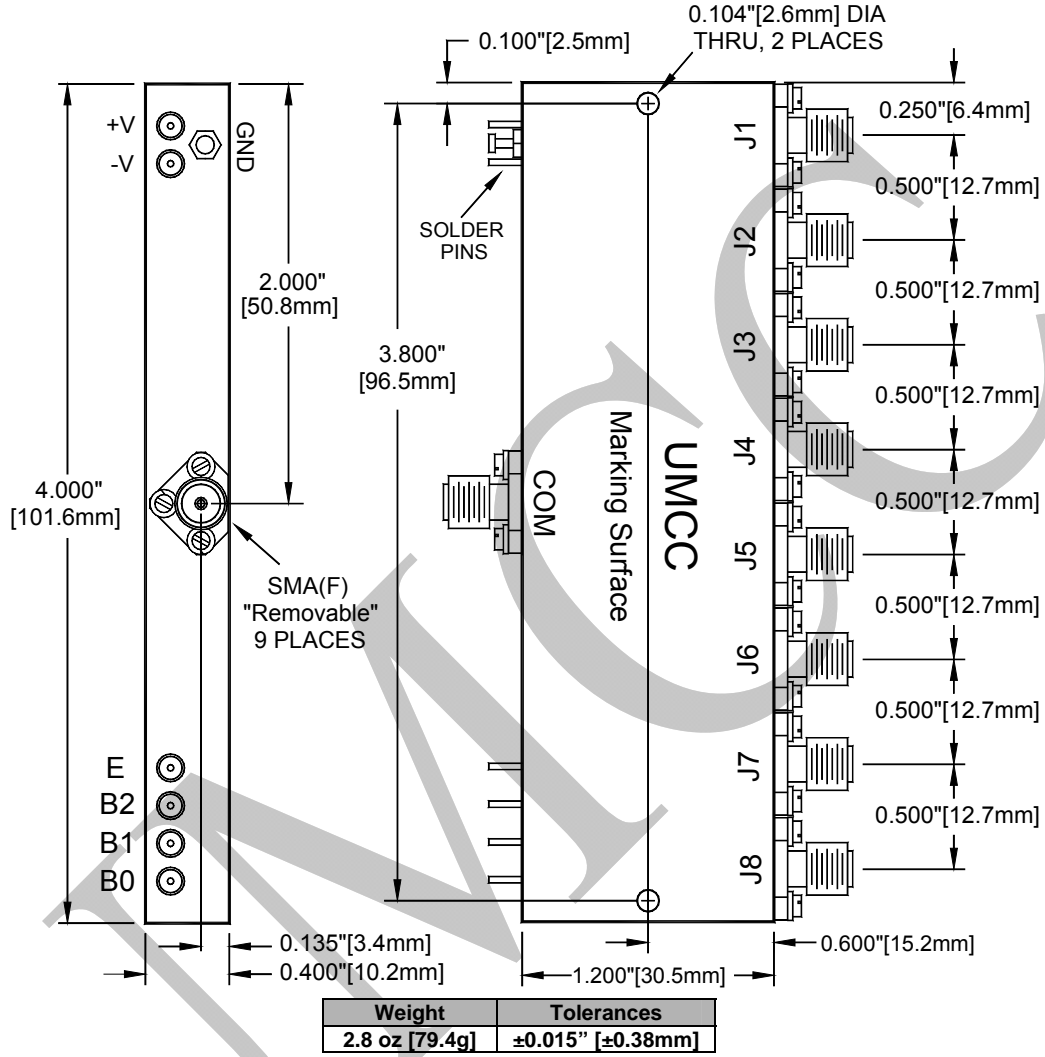

Function Table for Option "F2" (3-Bit Binary Control + Enable)

| INPUTS | | | | RF PATH | | | | | | | |
|--------|----|----|----|---------|-----|-----|-----|-----|-----|-----|-----|
| E | B2 | B1 | B0 | J1 | J2 | J3 | J4 | J5 | J6 | J7 | J8 |
| 0 | 0 | 0 | 0 | ON | OFF | OFF | OFF | OFF | OFF | OFF | OFF |
| 0 | 0 | 0 | 1 | OFF | ON | OFF | OFF | OFF | OFF | OFF | OFF |
| 0 | 0 | 1 | 0 | OFF | OFF | ON | OFF | OFF | OFF | OFF | OFF |
| 0 | 0 | 1 | 1 | OFF | OFF | OFF | ON | OFF | OFF | OFF | OFF |
| 0 | 1 | 0 | 0 | OFF | OFF | OFF | OFF | ON | OFF | OFF | OFF |
| 0 | 1 | 0 | 1 | OFF | OFF | OFF | OFF | OFF | ON | OFF | OFF |
| 0 | 1 | 1 | 0 | OFF | OFF | OFF | OFF | OFF | OFF | ON | OFF |
| 0 | 1 | 1 | 1 | OFF | OFF | OFF | OFF | OFF | OFF | OFF | ON |
| 1 | X | X | X | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF |