



Model: AG-N800-HV

Description:.....	Voltage Controlled PIN Attenuator
Operating Frequency:.....	8 - 18 GHz
Insertion Loss (0dB Attn. Ref.):.....	3.9 dB Max
Attenuation Range:.....	0 - 80dB Nominal Min
Attenuation Flatness:.....	1.0 dB PK-PK up to 10 dB
.....	2.4 dB PK-PK up to 20 dB
.....	4.4 dB PK-PK up to 40 dB
.....	5.0 dB PK-PK up to 80 dB
Control Function:.....	0-8 V, 10dB/Volt, (Impedance = 5~10K)
Transfer Function Accuracy (Mean Value):.....	0 - 0.8 dB ±50% Max
.....	> 0.8 - 10 dB ±0.50 dB Max
.....	> 10 - 30 dB ±0.60 dB Max
.....	> 30 - 50 dB ±1.00 dB Max
.....	> 50 - 70 dB ±1.25 dB Max
.....	> 70 - 80 dB ±1.50 dB Max
VSWR (all settings):.....	2.0:1 Max
Settling Time ("±1dB of Target Setting"):.....	1µs Max, (5µs<PW<0.1s)
Power Handling:.....	Operating..... +20 dBm Cw/Peak Max
.....	Survival..... +30 dBm Cw/AVG Max
Connectors (RF):.....	SMA (f), Removable
Connector (Supply & Controls):.....	Solder Pins
Temperature Coefficient (over -20°C to +75°C).....	±0.025dB/°C Max
Power Supply (internally regulated):.....	+12 to +15vdc @ 70mA Max
Impedance:.....	50 Ohms Nominal
Quality:.....	Best-Commercial-Grade

Environmental Ratings:

Temperature:.....	{Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity:.....	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:.....	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:.....	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:.....	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:.....	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)


- RF Connectors
 - B1 [J1 SMA (male)]
 - B2 [All SMA (male)]
- Control Connector
 - C1 [SMC (Jack), 50 Ω]
 - C2 [SMB (Jack), 50 Ω]
 - C3 [SMA (female)]
- Transfer Functions
 - F1 [Slope = 5dB/Volt]
 - F3 [Reverse Control Voltage (0V = Max Attenuation)]



Model: AG-N800-HV

Outline

("A" = 0.214" [5.4mm])

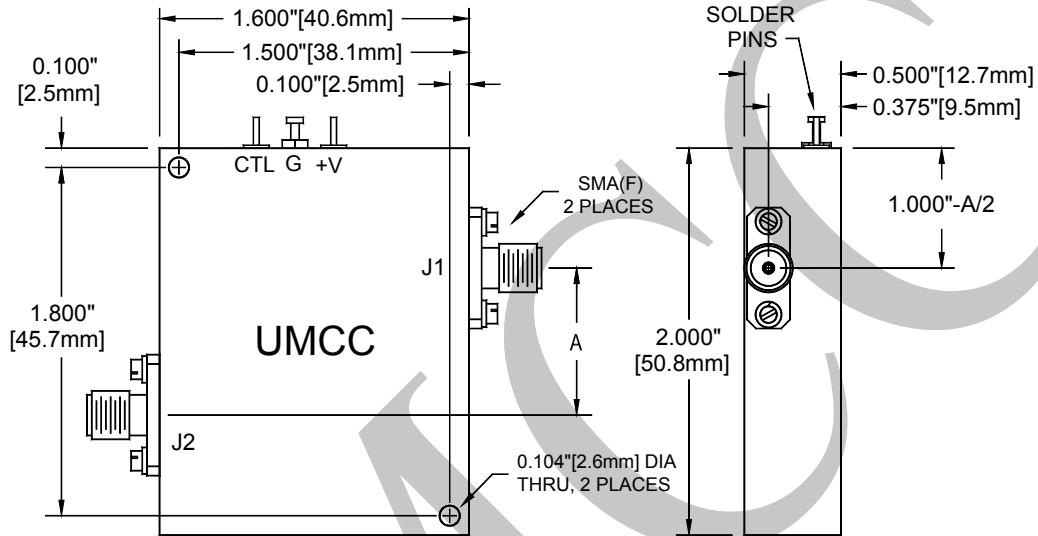

Weight	Tolerances
2.2 oz [62.4 g]	±0.015" [±0.38mm]